


# How to: Remove the Amp From the BR610, BR615



Rev A  
8/1/2008

**CARVIN**  
carvinservice.com




Only a certified technician should work on any Carvin Amp. Refer servicing to qualified service personnel! This unit contains high voltage inside!




You will need a drill, or a Phillips screw driver.

#### STEP 1

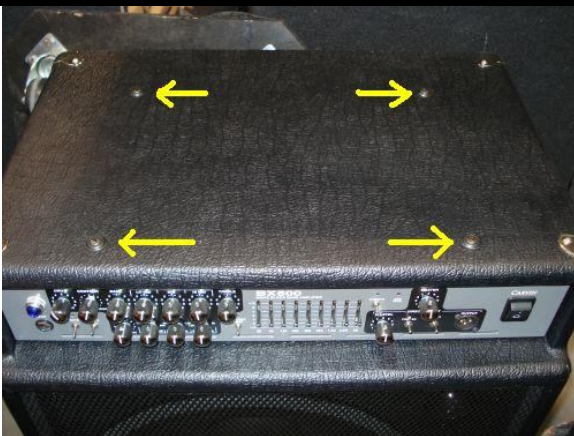


Remove the 4 screws.

#### STEP 2

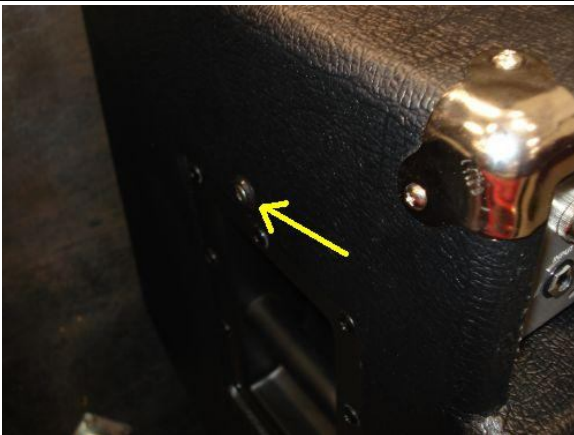

Remove screw. This is the left side of the cabinet.

STEP 3

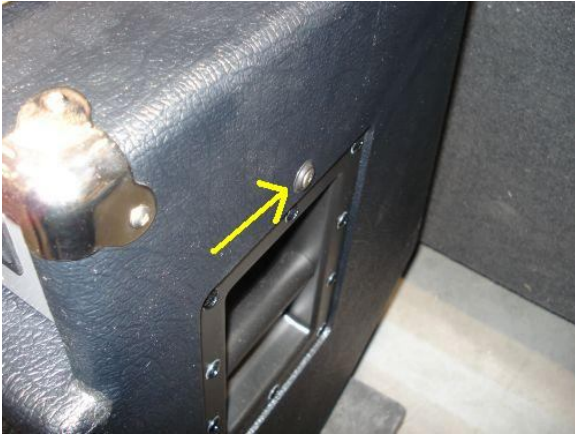

Remove screw. This is the right side of the cabinet.

STEP 4



Remove the Cable that goes from the Cabinet to the amp before you pull it out.

STEP 5



Remove the Amp.

Comments or questions email us at [Carvinservice@carvin.com](mailto:Carvinservice@carvin.com)