


How to: Replace the Diaphragm From a D-7652E




Rev A
10/14/2008

CARVIN
carvinservice.com

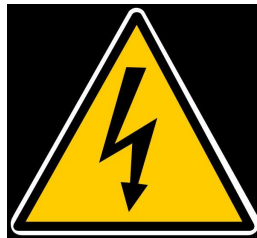

When removing the Driver from the speaker cabinet, make sure to turn off the amplifier. Don't work on the speaker while it's playing. You could get hurt! You could damage your amplifier and or speakers too.

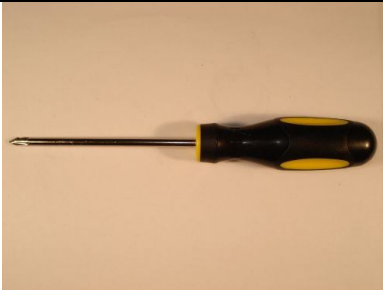

You will need a Phillips Screw Driver

STEP 1



Start by removing the back cover from the HF Driver.

D-7652E-8M = Driver
DH-7652E = Diaphragm

STEP 2



Remove the Diaphragm.

STEP 3



Install the new Diaphragm. The new Diaphragm should drop right in. After removing the old Diaphragm, clear or remove anything that might be floating around. You are looking for sand, dust, metal, plastic, it should be clean in and around.

STEP 4



Line up the holes before putting on the screws.

STEP 5



Screw the Driver into the Horn before installing it back in the cabinet.

Comments or questions email us at carvinservice@carvin.com